


Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water

Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.

Identification Codes





Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water

Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.

Identification Codes

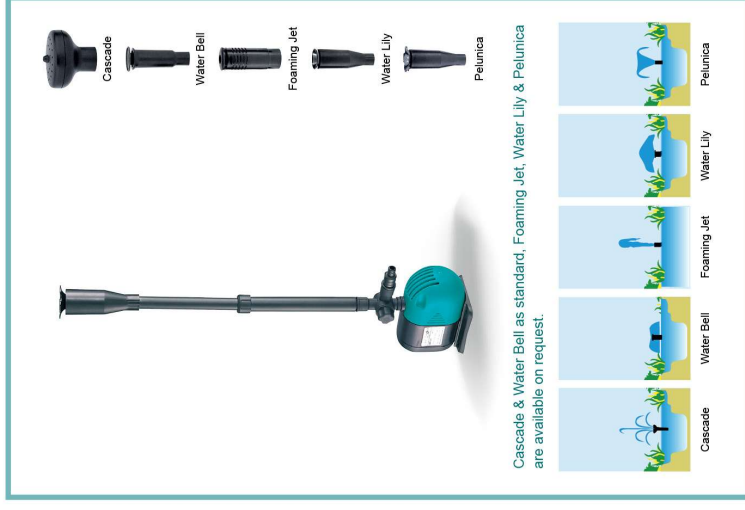

Technical Data

Model	Voltage V/Hz	Input Power W	Max. Head m	Max. Flow L/h	Outlet		Cable
					mm	mm	
XKF-15P	220-240 / 50	15	1.0	850	13	13	H05RN-F 10m
XKF-20P	220-240 / 50	20	1.1	1100	13	13	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.

Technical Data

Model	Voltage V/Hz	Input Power W	Max. Head m	Max. Flow L/h	Outlet		Cable
					mm	mm	
XKF-35P	220-240 / 50	35	1.4	1600	19	19	H05RN-F 10m
XKF-55P	220-240 / 50	55	2.3	2300	19	19	H05RN-F 10m
XKF-75P	220-240 / 50	75	2.7	2650	19	19	H05RN-F 10m
XKF-95P	220-240 / 50	95	3.0	3500	19	19	H05RN-F 10m
XKF-110P	220-240 / 50	110	3.7	3750	19	19	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.